

6 x 19 FC Class Wire Rope

6 Outer Strands, Rotation Wire Rope


Includes 6x19S & 6x26WS construction types. A good general purpose wire rope which is wear resistant and suitable for sling ropes, marine rope, lashing, fishing, anchor lines and logging.

6x19S (9+9+1) FC, Load bearing outer wires 114

6x26WS (10+(5+5)+5+1) FC, Load bearing outer wires 156

Fill factor 0.49

Use of swivel is **not** permitted.

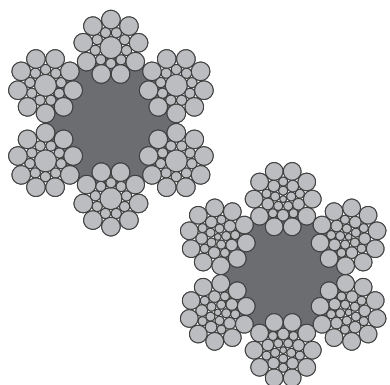

Diameter Inches	Weight per Foot Pounds	Grade Tensile	Bright		Galvanized	
			Wesco Code	Minimum Strength Pounds	Wesco Code	Minimum Strength Pounds
1/4	0.11	EIPS	W61908C1	6,040	W61908D1	5,436
5/16	0.16	EIPS	W61910C1	9,380	W61910D1	8,442
3/8	0.24	EIPS	W61912C1	13,420	W61912D1	12,078
7/16	0.32	EIPS	W61914C1	18,180	W61914D1	16,362
1/2	0.42	EIPS	W61916C1	23,600	W61916D1	21,240
9/16	0.53	EIPS	W62618C1	29,800	W61918D1	26,820
5/8	0.66	EIPS	W62620C1	36,600	W61920D1	32,940
3/4	0.95	EIPS	W62624C1	52,400	W61924D1	47,160
7/8	1.29	EIPS	W62628C1	70,800	W61928D1	63,720
1	1.68	EIPS	W62632C1	92,000	W61932D1	82,800
1-1/8	2.13	EIPS	W62636C1	115,800	W61936D1	104,220
1-1/4	2.63	EIPS	W62640C1	142,000	W61940D1	127,800
1-1/4	2.63	EEIPS	~	~	W62640D1C- EEIPS	156,200
1-3/8	3.18	EIPS	W62644C1	170,800	W61944D1	153,720
1-1/2	3.78	EIPS	W62648C1	202,000	W61948D1	181,800
1-5/8	4.4	EIPS	W62652C1	236,000	W61952D1	212,400
1-3/4	5.15	EIPS	W62656C1	272,000	W61956D1	244,800
1-7/8	5.91	EIPS	W62660C1	310,000	W61960D1	279,000
2	6.72	EIPS	W62664C1	352,000	W61964D1	316,800
2-1/4	8.51	EIPS	W62672C1	440,000	W61972D1	396,000
2-1/2	10.50	EIPS	W62680C1	538,000	W62680D1	484,200

