

7 x 7 & 7 x 19 Black Powder Coated Rope

6 Outer Strands, Rotation Wire Rope

A commercial grade aircraft cable which is flexible and is coated black. The black coating process hides the cable from sight for flying scenes, scenery and lighting applications. Swaging sleeves can be applied directly over the coating, no removing of the covers required. Coating is durable and is flake resistant. A great rope for stage rigging, studio rigging and other entertainment applications.

7x7 (6+1) WSC, Load bearing outer wires 42

Fill factor 0.55


7x19 (12+6+1) WSC, Load bearing outer wires 114

Fill factor 0.57

Manufactured to US Federal Specification RR-W-410F

Use of swivel is **not** permitted.

Diameter Inches	Weight per Foot Pounds	Grade Tensile	7 x 7 Construction		7 x 19 Construction	
			Wesco Stock Code	Minimum Strength Pounds	Wesco Stock Code	Minimum Strength Pounds
1/16	0.01	IPS	W70702BE	480	~	~
3/32	0.02	IPS	W70703BE	920	~	~
1/8	0.03	IPS	~	~	W71904BE	2,000
5/32	0.05	IPS	~	~	W71905BE	2,800
3/16	0.07	IPS	~	~	W71906BE	4,200
1/4	0.11	IPS	~	~	W71908BE	7,000

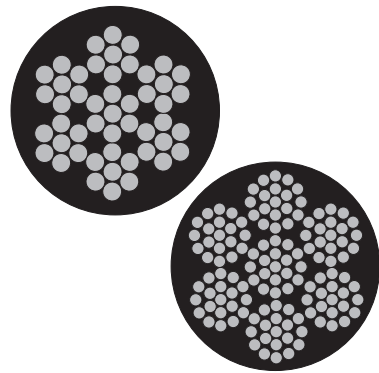

7 x 7 & 7 x 19 Nylon Coated Wire Rope

Galvanized 6 Outer Strands, Rotation Wire Rope

Nylon is more effective in high cycle applications and rough conditions where some rubbing and scrubbing is present. The Nylon-11 coating applied to our product is a hard wearing, flexible and abrasion resistant product superior to standard Nylon coated products. Excellent for use as gym cables, studio rigging running lines and motion control cables. Colour stocked is Black.

Wire Rope Diameter Inches	Outside Diameter Inches	Weight per Foot Pounds	7 x7 Construction		7 x 19 Construction	
			Wesco Stock Code	Minimum Strength Pounds	Wesco Stock Code	Minimum Strength Pounds
1/16	3/32	0.01	W70702BN	480	~	~
3/32	1/8	0.02	W70703BN	920	~	~
1/8	3/16	0.04	~	~	W71904BN	2,000
5/32	3/16	0.06	~	~	W71905BN	2,800
3/16	1/4	0.08	~	~	W71906BN	4,200