

ProCraft SH-D Chain Hoists

Main features include:

- Durable construction, lightweight and highly efficient.
- Robust and fully enclosed stamped steel housing.
- Reinforced hand chain wheel cover.
- Ball bearings on side plate, gearbox and housing cover for an increased service life.
- High quality and precise bearings used for precision lifting and ease of use with a low effort at rated capacity.
- Increased corrosion protection from internal plated parts
- Fully inspectable load hooks with heavy duty cast steel latches
- Meets or exceeds ASME B30.16



Capacity tonnes	1/2	1	1-1/2	2	3	5	10
Part # 10 ft	91HND-P05010	91HND-P10010	N/A	91HND-P20010	91HND-P30010	N/A	N/A
Part # 20 ft	91HND-P05020	91HND-P10020	91HND-P15020	91HND-P20020	91HND-P30020	91HND-P50020	91HND-P100020
Part # 30 feet	91HND-P05030	91HND-P10030	N/A	N/A	N/A	N/A	N/A
Part # 40 ft	91HND-P05040	91HND-P10040	N/A	N/A	N/A	N/A	N/A
Part # head*	91HND-P05H	91HND-P100H	N/A	91HND-P200H	91HND-P300H	N/A	N/A


*Head can be loaded with any length of chain required, 15 ft or longer
30 ft, 40 ft and head is stocked as black finish, 10 & 20 ft are standard blue colour.

ProCraft SH-D Chain Hoists

A heavy duty high quality chain hoist, with a compact light weight construction. Suitable for rugged conditions and narrow spaces when lifting, pulling, tensioning and moving.

The design and specification of the ProCraft SH-D chain hoist includes:

- Range 1/2 Ton to 10 Ton
- Highly efficient with a light weight design, and durable construction with reinforced hand wheel cover
- Plated brake parts and guide rollers for increased corrosion resistance.
- Precision guide rollers for a smoother operation of the load chain
- Sealed bearings on the gearbox, side plates and load chain sheave increases service life
- Fully inspectable load bearing hooks, with cast steel latches
- Each hoist is proof load tested to 1.5 times the working load limit
- Meets or exceeds ASME B30.16

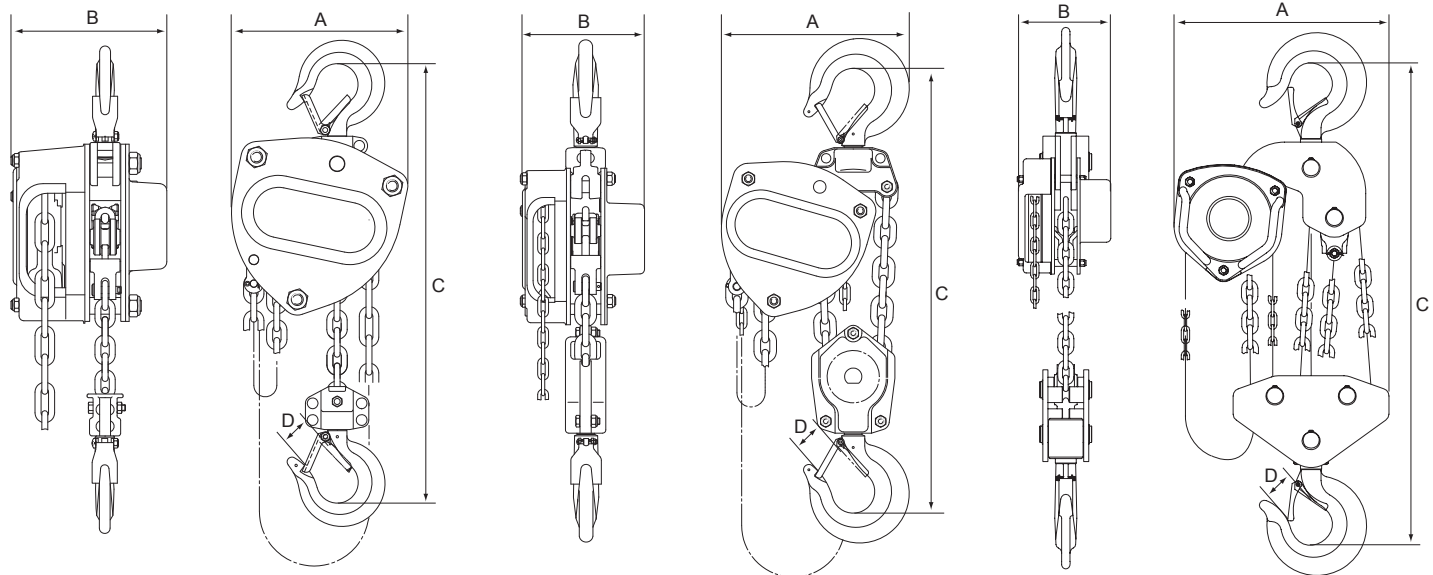

Capacity (tonnes)		1/2	1	1-1/2	2	3	5	10
Model #		SH-0.5D	SH-1D	SH-1.5D	SH-2D	SH-3D	SH-5D	SH-10D
No of Falls		1	1	1	1	2	2	4
Test load		0.75 ton	1.5 ton	2.25 ton	3 ton	4.5 ton	7.5 ton	12.5 ton
Load Chain	mm	5 x 15	6 x 18	7.1 x 21	8 x 24	7.1 x 21	9 x 27	9 x 27
Pull at rated load	lbf	50	64	66	74	69	75	77
Standard Lift	ft	10	10	20	10	10	20	20
Net Weight	lbs	22.3	26.5	51.4	43.5	55.5	124.1	216.4
Extra weight per foot	lbs	1.08	1.21	1.43	1.61	2.15	3.09	5.51
Dimensions Inches	a	5.83	6.81	7.72	8.31	8.98	10.99	18.23
	b	5.23	5.91	6.81	6.93	6.85	7.91	7.91
	c	13.62	14.80	17.40	18.50	22.05	26.30	30.12
	d	1.10	1.26	1.50	1.57	1.73	1.97	2.52