


Closed Spelter Sockets

Quenched and tempered cast steel

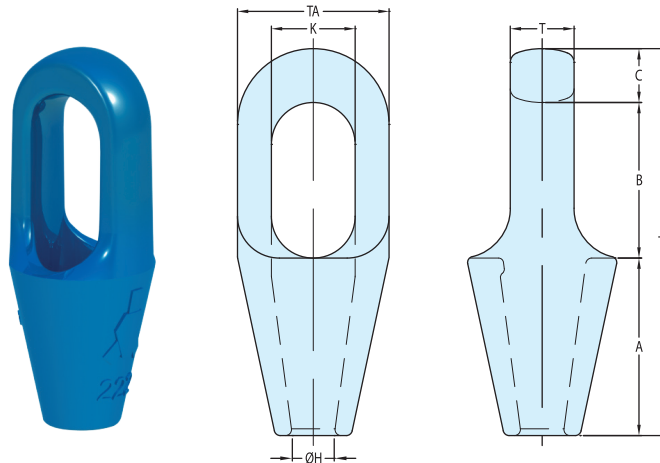

Model nr.	MBL (UStons)	for wire Ø		Strand Ø		Dimensions (inch)								Weight (lbs)
		mm	inch	mm	inch	A	B	C	ØH	K	T	TA	TL	
CSS 296	9	6-7	¼	-	-	1 15/16	1 9/16	7/16	3/8	7/8	½	1 7/16	4	1
CSS 297	13	8-10	3/8	-	-	2 ¼	1 7/8	9/16	½	1	1 1/16	1 1/16	4 1/16	1
CSS 298	22	11-13	7/16 - ½	-	-	2 ½	2 5/16	1 1/16	9/16	1 3/16	7/8	2	5 ½	2
CSS 299	28	14-16	9/16 - 5/8	13	½	3	2 9/16	13/16	1 1/16	1 7/16	1	2 5/8	6 3/8	3
CSS 200	44	18-19	¾	14-16	9/16 - 5/8	3 ½	3 1/16	1 1/16	7/8	1 5/8	1 ¼	3	7 5/8	5
CSS 201	61	20-22	7/8	18-19	¾	4	3 9/16	1 5/16	1	1 7/8	1 ½	3 5/8	8 13/16	8
CSS 204	83	23-26	1	20-22	7/8	4 ½	4 1/16	1 7/16	1 1/8	2 ¼	1 ¾	4 ½	9 15/16	12
CSS 207	99	27-30	1 1/8	23-26	1	5	4 9/16	1 9/16	1 5/16	2 ½	2	4 ½	11 1/8	16
CSS 212	138	31-36	1 ¼ - 1 3/8	27-28	1 1/16 - 1 1/8	5 ½	5 1/8	1 11/16	1 9/16	2 ¾	2 ¼	4 15/16	12 5/16	22
CSS 215	165	37-39	1 ½	30-32	1 3/16 - 1 ¼	6	6 1/8	2	1 11/16	3 3/8	2 ½	5 3/8	14 1/8	29
CSS 217	187	40-42	1 5/8	33-35	1 5/16 - 1 3/8	6 ½	6 ¾	2 1/8	1 13/16	3 ¼	2 ¾	5 ¾	15 3/8	37
CSS 219	248	43-48	1 ¾ - 1 7/8	36-40	1 7/16 - 1 5/8	7 ½	7 13/16	2 3/16	2 1/16	3 11/16	3	6 ¾	17 7/16	56
CSS 222	309	49-54	2 - 2 1/8	42-45	1 5/8 - 1 ¾	8 ½	8 13/16	2 7/16	2 5/16	3 15/16	3 ¼	7 5/8	19 ¾	81
CSS 224	397	55-60	2 ¼ - 2 3/8	46-48	1 13/16 - 1 7/8	9	9 ¾	2 7/8	2 9/16	4 7/16	3 5/8	8 ½	21 9/16	111
CSS 226	468	61-68	2 ½ - 2 5/8	50-54	2 - 2 1/8	9 ¾	10 5/8	3 1/8	2 15/16	5 ½	4	9 ½	23 ½	144
CSS 227	507	69-75	2 ¾ - 2 7/8	56-62	2 ¼ - 2 ½	11	11 ¼	3 1/8	3 3/16	6 ¼	4 7/8	10 ¾	25 3/8	201
CSS 228	617	76-80	3 - 3 1/8	64-67	2 ½ - 2 5/8	12 3/8	11 ¾	3 ¼	3 ½	6 ¾	5 ¼	11 ½	27 3/8	257
CSS 229	689	81-86	3 ¼ - 3 3/8	69-76	2 ¾ - 3	13	12 ¼	4	3 5/8	7 ¼	5 ¾	12 ¼	29 ¼	274
CSS 230	794	87-93	3 ½ - 3 5/8	78-86	3 1/16 - 3 3/8	14	13	4	3 7/8	7 ¾	6 ¼	13	31	388
CSS 231	965	94-102	3 ¾ - 4	88-96	3 7/16 - 3 ¾	15	14	4 ¼	4 ¼	8 ½	7	14 ¼	33 ¼	502
CSS 233	1323	108-115	4 ¼ - 4 ½	98-110	3 7/8 - 4 5/16	17 11/16	16 ¾	4 15/16	5 1/16	9 ¼	7 ½	15 15/16	39 3/8	712
CSS 240	1543	120-130	4 ¾ - 5	112-124	4 7/16 - 4 7/8	19 11/16	20 11/16	4 15/16	5 13/16	10 ¼	7 7/8	17 11/16	45 ¼	986
CSS 245	1764	135-140	5 ¼ - 5 ½	125-132	4 15/16 - 5 3/16	21 ¼	19 ½	6	6 1/16	11 ½	8 ¾	20 ½	46 5/8	1422
CSS 250	2205	142-153	5 ¾ - 6	133-143	5 ¼ - 5 5/8	23 1/16	20 ¾	6 11/16	6 ¾	12	9 7/16	21 ½	50 ½	1634
CSS 255	2447	154-165	6 ½ - 6 ¼	144-154	5 11/16 - 6 ¼	24 13/16	22 ¼	6 7/8	7 5/16	13	10	22 5/8	53 7/8	1896
CSS 260	2756	166-178	6 ¾ - 7	155-166	6 ¼ - 6 ¾	26 ¾	23 ¼	7	7 13/16	13	10 5/8	23 7/16	57	2172
CSS 265	3086	180-191	7 ¼ - 7 ½	167-179	6 9/16 - 7 1/16	28 9/16	24 ½	7 ½	8 3/8	13 ¾	11 ½	24 5/8	60 7/16	2608
CSS 270	3527	192-204	7 ¾ - 8	180-191	7 ¼ - 7 ½	30 ½	25 9/16	8 ¼	9	15 ½	12	27 ¼	64 ¼	3278

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available. Socket range CSS 296 until CSS 201 is delivered with galvanized finish, other finishes are available upon request. All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable. Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges). Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance. Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.